



BLJ1 (单枪) 型冷室压铸机

BLJ2 (双枪) 型冷室压铸机

Cold Chamber Casting Type BLJ1 Single Spray Die
Cold Chamber Casting Type BLJ2 Double Spray Die

■ 性能特点:

增加退火后玻璃瓶罐的润滑性和耐磨性,可以配备由0.3米至4.5米宽的网带退火炉; PLC可编程控制及光申开关光侧系统。

■ 涂料:

可溶水的聚二醇及聚二脂类,不溶水的硬脂酸类,硅酮等悬浮物; 油脂类。

■ 技术参数:

| | |
|----------|-----------|
| 电源 | 220V/50Hz |
| 喷枪最大移动速度 | 1m/s |
| 气源压力 | 0.4MPa |
| 装机容量 | 0.4Kw |

■ Use and Features

To increase the lubricity and anti-friction of glass bottles after annealing.

This equipment can be installed on annealing lehrs with belt widths from 1.2 meters to 4.5 meters

The traverse motion is controlled by PLC programmable controller and infrared photo detect unit.


■ Coating Material

Polydiester and polyalkylene or the equivalent dissolved in water.

■ Technical Data

| | |
|-------------------------|-----------|
| Power | 220V/50Hz |
| Spray Nozzle Max. Speed | 1 m/s |
| Air Pressure | 0.4 MPa |
| Power Required | 0.4 Kw |

| | | | | | |
|------|------|--------------------|------|------|--------------------|
| 2700 | 3250 | BLJT2700, BLJS2700 | 4500 | 4890 | BLJT4500, BLJS4500 |
| 2400 | 2950 | BLJT2400, BLJS2400 | 4200 | 4750 | BLJT4200, BLJS4200 |
| 2100 | 2650 | BLJT2100, BLJS2100 | 3900 | 4450 | BLJT3900, BLJS3900 |
| 1800 | 2350 | BLJT1800, BLJS1800 | 3600 | 4150 | BLJT3600, BLJS3600 |
| 1500 | 2050 | BLJT1500, BLJS1500 | 3300 | 3850 | BLJT3300, BLJS3300 |
| 1200 | 1750 | BLJT1200, BLJS1200 | 3000 | 3550 | BLJT3000, BLJS3000 |

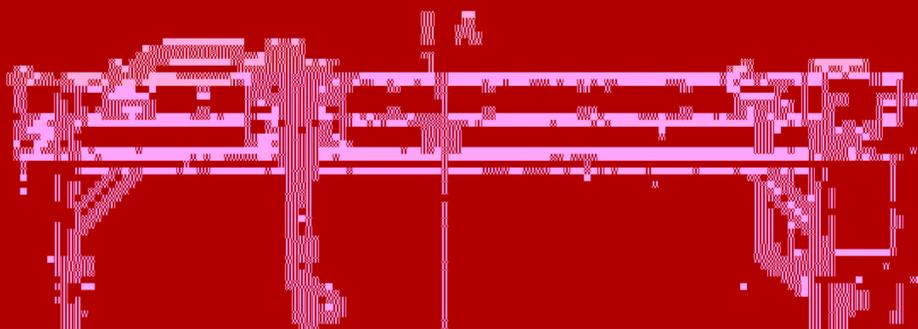

山东三金玻璃机械有限公司

地址: 中国山东省淄博市周村区兴鲁大道577号
 电话: 0533 6182508/6180774
 传真: 0533 6187508/6166065
 网址: www.sanjinglass.com
 邮编: 255390

Shandong Sanjin Glass Machinery Co., Ltd.

Address: 577 Xinglu Road, Zhoucun Zibo 255300, Shandong, China
 Tel: +86 533 6182508/6180774
 Fax: +86 533 6187508/6166065
 WebSite: www.sanjinglass.com